

Product Profile

- Rugged encapsulation for harsh environments
- Consistent UHF range performance worldwide
- Available with Gen 2 and ISO 18000-6B silicon
- Delivers superior performance on a variety of materials
- Reusable for lower cost per use



UHF LARGE RIGID RFID TAG

Intermec's Large Rigid tag is a truly passive UHF radio frequency identification (RFID) transponder that delivers superior performance on a variety of surfaces including plastic, wood and metal. The tag, available in both Gen 2 and ISO 18000-6B versions, combines an impressive range with a rugged yet compact package designed for harsh industrial applications and temperatures ranging from -40° to 250° F (-40° to +121° C). No other tag on the market can claim the ruggedness and worldwide usability of these tags.

The Large Rigid tag has a wide band antenna design, which allows for a single tag to be used virtually anywhere in the world with consistent UHF range performance. The EPC Global Gen 2 version of the large Rigid Tag has 96 bits of memory, while the ISO 18000-6B version has 2024 bits of memory. Additionally, the tag has a robust physical package and is designed for exposure to substances and harsh chemicals representative of typical industrial applications, including machining oil, gasoline, motor oil, methyl ethyl ketone (MEK), isopropyl alcohol, methyl alcohol, mineral spirits, acetone, and kerosene.

Typical applications include:

- Tractors and trailers
- Reusable plastic containers (RPC)
- Metal cages
- Wood and plastic pallets
- Unit loading devices (ULD)

Attachment Methods

The tag can be attached using screws, rivets, double-sided adhesive strips, or a variety of other methods appropriate for the application, and includes two mounting holes for up to #6 hardware (not included).

Reader Compatibility

Intermec manufactures a complete line of readers that are compatible with the large Rigid Tags as indicated in the table below.

Tag Type	Intermec Reader Models
EPC Global Gen 2	IP4 Hand-Held Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader
ISO 18000-6B	IP3 Hand-Held Reader IP4 Hand-Held Reader Pennsylvania Fixed Serial Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader


The EPC Global Gen 2 and ISO 18000-6B large Rigid Tags are also compatible with competitive readers operating under the established standards for the respective Gen 2 and 18000-6B protocols.

Application Temperature
 -40°F to 250°F (-40°C to 121°C)


- Chemical Resistance**
- Machining oil and fluid
 - Gasoline
 - Motor oil
 - Methyl Ethyl Ketone (MEK)
 - Isopropyl alcohol
 - Methyl alcohol
 - Mineral spirits
 - Acetone
 - Kerosene

Note
 Actual range performance may vary depending on power output, temperature and other environmental factors.

Typical Read Range Performance Large Gen 2 Rigid Tag

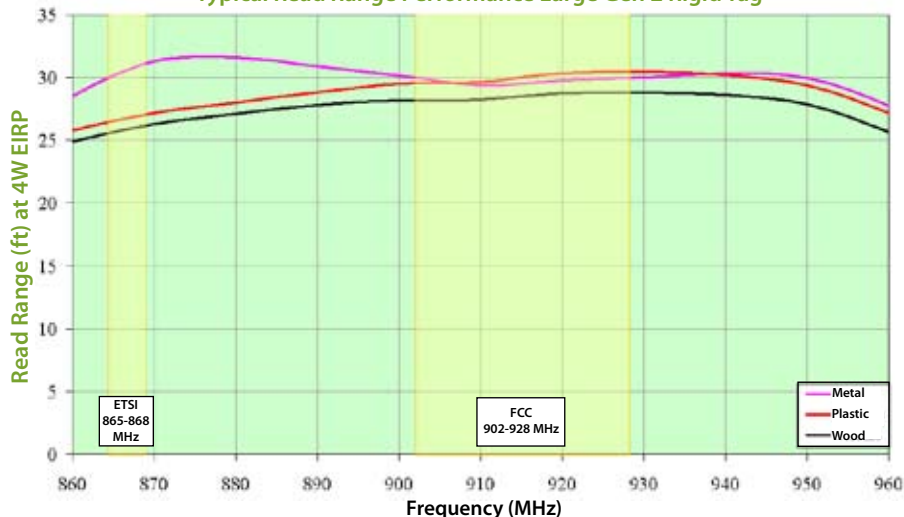

Typical Read Range Performance Large ISO 18000-6B Rigid Tag

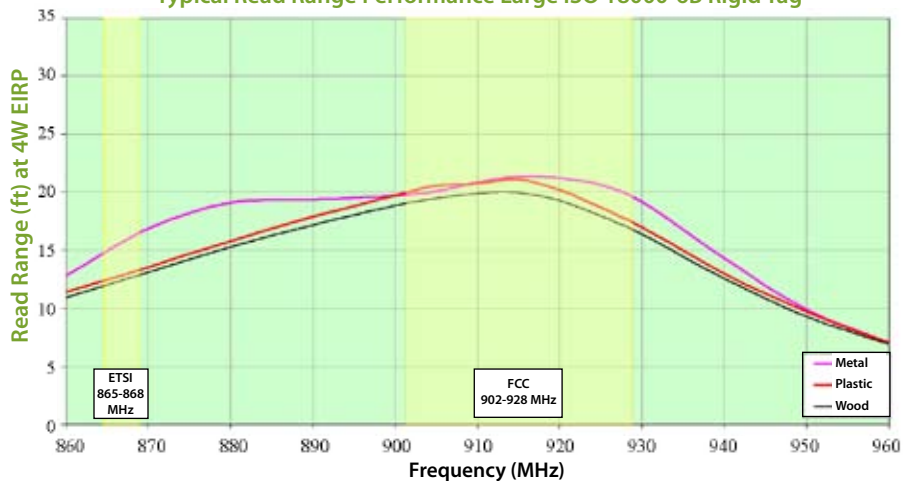

Size
 3.2 cm x 14.27 cm (1.26 in x 6.1 in)



www.egomexico.com/rfid

